

PTL S1™

A safer substitute for STOP-SLOW hand held signs

RMS Type Approval Number: ITS-TAN000125



Shown with optional Ballast & Target Board.
Target Boards Mandatory in NSW.

POWER SPECIFICATIONS:

POWER SUPPLY
ENERGY STORAGE
BATTERY CHARGER

Nominal 12 Volts. Range 10.8 – 14.2V
12V 20AH LiPo Battery
240V AC Input – Output 12V 100W

ENDURANCE SPECIFICATION:

Up to 24 hours operation on a full charge

OPTICAL SPECIFICATIONS:

RED, YELLOW, GREEN ASPECTS
200mm, with Automatic Dimming
YELLOW REAR BEACON

CONTROL SPECIFICATIONS:

Data Signs PTL-S1
Remote Operation as per AS 4191-2015 &
MRTS264(QLD) TSI-SP-062,049 and 50

MECHANICAL SPECIFICATIONS:

WEIGHTS
STAND
BATTERY PACK
LIGHT
TOTAL
OPTIONAL TARGET BOARD

2.6 Kg
4.4 Kg including Remote
7.4 Kg
17.0 Kg
2.20 Kg

TRIPOD STAND
HEIGHT (FULLY SETUP)

1480mm diameter footprint
2270mm (not including Target Board)

WIND LOADING


20 m/s (72 Kph) with 20Kg ballasts placed
on each leg

CARRY BAG FOR LIGHTS & STAND

920mm Long x 400mm High x 400mm Wide

TYPE 1
OPERATIONAL CONTROL
VIA REMOTE ONLY

OPTIONS:
TARGET BOARD
BALLAST (SET OF 3) PER UNIT

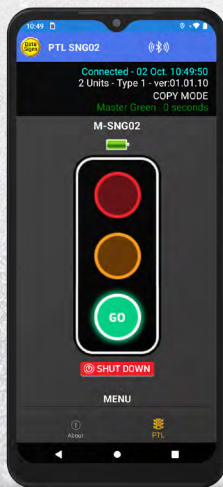


OPERATIONAL MODE:

Gating (single unit use)

Optional Ballast
(Mandatory for QLD)



Carry bag

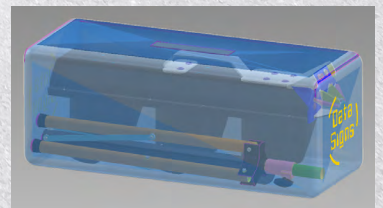

Designed for easy fold away
and storage function



Data Signs
AUSTRALIA
Since 1976

datasigns.com
1300 850 785

