

## A safer substitute for STOP-SLOW hand held signs

RMS Type Approval Number: ITS-TAN000125

TMR Type approval Number: 24-15 for Gating Mode

### POWER SPECIFICATIONS:

POWER SUPPLY  
ENERGY STORAGE  
BATTERY CHARGER

Nominal 12 Volts. Range 10.8 – 14.2V  
12V 20AH LiPo Battery  
240V AC Input – Output 12V 100W

### ENDURANCE SPECIFICATION:

Up to 24 hours operation on a full charge

### OPTICAL SPECIFICATIONS:

RED, YELLOW, GREEN ASPECTS  
200mm, with Automatic Dimming  
YELLOW REAR BEACON

### CONTROL SPECIFICATIONS:

Data Signs PTL-S1  
Remote Operation as per AS 4191-2015 &  
MRTS264(QLD) TSI-SP-062,049 and 50

### MECHANICAL SPECIFICATIONS:

WEIGHTS  
STAND  
BATTERY PACK  
LIGHT  
TOTAL  
OPTIONAL TARGET BOARD

2.6 Kg  
4.4 Kg including Remote  
7.4 Kg  
17.0 Kg  
2.20 Kg

TRIPOD STAND  
HEIGHT (FULLY SETUP)

1480mm diameter footprint  
2270mm (not including Target Board)

WIND LOADING


20 m/s (72 Kph) with 20Kg ballasts placed  
on each leg

CARRY BAG FOR LIGHTS & STAND

920mm Long x 400mm High x 400mm Wide

TYPE 1  
OPERATIONAL CONTROL  
VIA REMOTE ONLY

OPTIONS:  
TARGET BOARD  
BALLAST (SET OF 3) PER UNIT

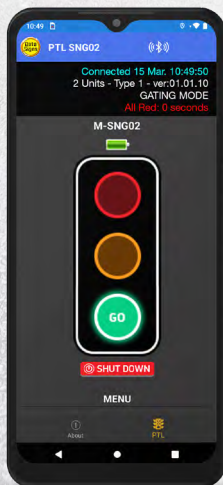

### OPERATIONAL MODE:

Gating (single unit use)



Shown with optional Ballast.

Optional Ballast  
(Mandatory for QLD)



Carry bag



Designed for easy fold away  
and storage function



**Data Signs**  
AUSTRALIA  
Since 1976

 [datasigns.com](https://datasigns.com)  
 1300 850 785

