



A safer substitute for STOP-SLOW hand held signs

RMS Type Approval Number: ITS-TAN000125

TMR Type approval Number: 24-15

POWER SPECIFICATIONS:

POWER SUPPLY
ENERGY STORAGE
BATTERY CHARGER

Nominal 12 Volts. Range 10.8 – 14.2V
12V 20AH LiPo Battery
240V AC Input – Output 12V 100W

ENDURANCE SPECIFICATION:

Up to 24 hours operation on a full charge

OPTICAL SPECIFICATIONS:

RED, YELLOW, GREEN ASPECTS
200mm, with Automatic Dimming
YELLOW REAR BEACON

CONTROL SPECIFICATIONS:

Data Signs PTL-Stop-n-Go & PTL
Remote Operation as per AS 4191-2015 &
MRTS264(QLD) TSI-SP-062,049 and 50

**COMMUNICATION
RANGE BETWEEN MASTER-SLAVE**

900MHZ ISM SSFH Multiband, 8 channels selectable
up to 800m line of sight

MECHANICAL SPECIFICATIONS:

WEIGHTS
STAND
BATTERY PACK
LIGHTS
TOTAL
OPTIONAL TARGET BOARD

TMR Type approval No: 24-15

2.6 Kg
4.4 Kg including Remote
7.4 Kg
17.0 Kg
2.20 Kg

**TRIPOD STAND
HEIGHT (FULLY SETUP)**

1480mm diameter footprint
2270mm (not including Target Board)

WIND LOADING

20 m/s (72 Kph) with 20Kg ballasts placed
on each leg

CARRY BAG FOR LIGHTS & STAND

920mm Long x 400mm High x 400mm Wide

**TYPE 1
OPERATIONAL CONTROL
VIA REMOTE ONLY**

**OPTIONS:
BALLAST (SET OF 3) PER UNIT**



Smart Terminal,
Remote Control

OPERATIONAL MODES:


- Gating (single unit use)
- Shuttle (dual unit use)
- Copy (for gating mode. *Not QLD*)
- Plant Crossing (*Not QLD*)



Optional Ballast
(Mandatory for QLD)



Carry bag

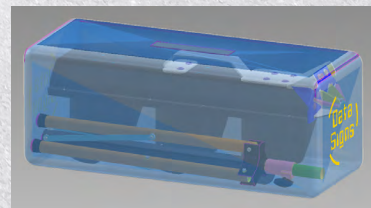

Designed for easy fold away
and storage function



Data Signs
AUSTRALIA
Since 1976

datasigns.com
1300 850 785

